











SPECIFICATION



SIGHTLINES

FRAME 70 MM GLASS TO GLASS 25MM

GLAZING

MAX. 44 MM, MIN. 23 MM


MAXIMUM DIMENSIONS


7M2

COLOUR

POWDER COATING RAL FINISH STANDARD 7016M, 9005M, 9016G AVAILABLE IN 150+ RAL FINISHES TEXTURED FINISH AVAILABLE SPLIT COLOR FOR INTERIOR/EXTERIOR WOOD EFFECT POWDER COATING ANODIZED ALUMINIUM





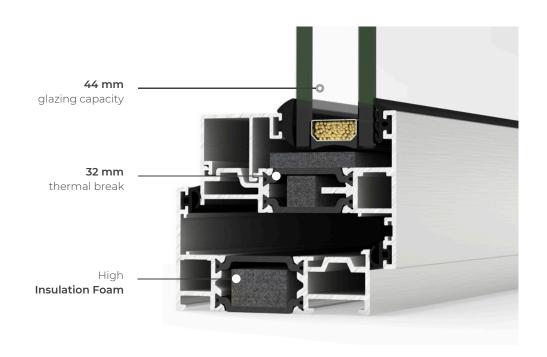


FEATURES	
U value	Double glazing * Triple glazing * Uw from 1.4 (W/m ² K) $Uw \ge 1.0 (W/m^2K)$
Acoustic insulation (1))	Rw up to 45 dB
Air permeability	Class 4
Water tightness	Class E1200
Wind resistance	Class CE 2400
Security test PAS24 ✓	Passed

^{*} Double glazing Ug=1.0 / Triple glazing Ug=0.5 Security test: Reference test 1.438 x 1.33 m / 1 sash

CONFIGURATIONS



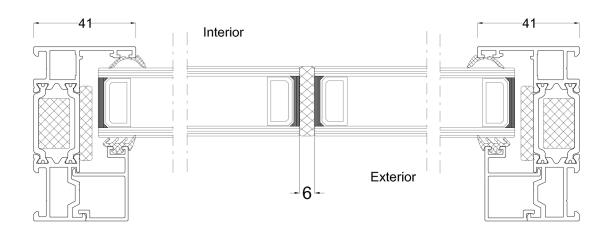


GLASS TO GLASS


THE GLASS TO GLASS JOINTS ARE SILICONE
SEALED ON INSTALLATION WITH SUITABLE
STRUCTUAL GLAZING SILICONE. THE SIGHTLINE IS
ONLY 25MM INCLUDING THE GLASS SPACER BARS.

FRAMELESS CORNERS


FRAMELESS CORNERS ARE AVAILABLE WITH STEPPED EDGE UNITS.

DRAINAGE SUBCILLS











HEAD EXTENSION



HEAD EXTENSION 20 MM




HEAD EXTENSION 38 MM



GLIDELINE GO

KEEP UP TO DATE WITH YOUR GLAZING PROJECTS WITH GLIDELINE GO

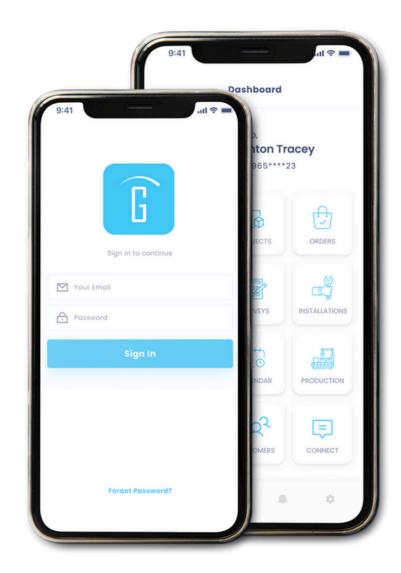







Introducing GlidelineGO – the ultimate system designed to streamline your glazing order management process. With GlidelineGO, customers and trade partners can effortlessly create, track, and manage orders, while enjoying the convenience of approving drawings and making payments directly within the app.

Efficiency and ease-of-use are at the heart of GlidelineGO. Whether you're an architect, contractor, or glazing professional, this powerful app empowers you to take control of your glazing projects, ensuring a seamless experience from start to finish.









