

Glideline

GS20 CLASSIC



Architectural Glazing Systems



Specification



CONFIGURATIONS

2 TRACK, 3 TRACK, QUAD TRACK

SIGHTLINES

INTERLOCK 20 MM

GLAZING

MAX. 30 MM, MIN. 26 MM DOUBLE GLAZED

MAXIMUM SASH DIMENSIONS

WIDTH (L) 2500 MM, HEIGHT (H) 3000 MM

MAXIMUM SASH WEIGHT

320 KG

COLOUR

POWDER COATING RAL FINISH
STANDARD 7016M, 9005M, 9016G
AVAILABLE IN 150+ RAL FINISHES
TEXTURED FINISH AVAILABLE
SPLIT COLOR FOR INTERIOR/EXTERIOR
WOOD EFFECT POWDER COATING
ANODIZED ALUMINIUM

BFRC Rating

kWh/(m² .yr)

>20	A	++
>10 to 20	A	+
0 to <10	A	✓
-10 to <0	B	
-20 to <-10	C	
-30 to <-20	D	
-50 to <-30	E	


FEATURES		
Transmittance		Uw ≥ 1.3 (W/m ² K)
Acoustic insulation		Rw up to 41 dB
Air permeability		Class 4
Water tightness		Class 7A
Wind resistance		Class C5



INTERLOCK HANDLE



SECURITY
HARDWARE

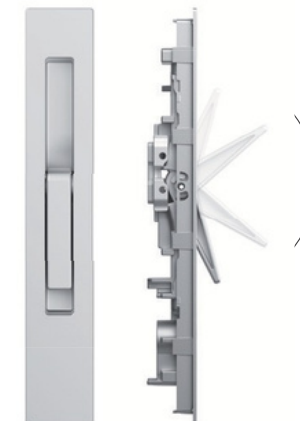


FLUSH SECURITY
HARDWARE


Sliding




1 Sliding / 1 Fixed




2 Sliding




2 Sliding / 1 Fixed




2 Sliding / 1 Fixed




2 Sliding / 2 Fixed




Quad Track



4 Sliding / 2 Fixed




6 Sliding




Pocket




1 Pane Pocket




2 Pane Pocket




2 Pane Pocket




3 Pane Pocket




Quad Pocket




2 Pane Corner



4 Pane Corner




6 Pane Corner

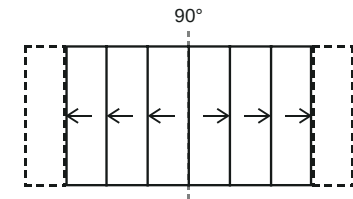


Heritage




1 Sliding / 1 Fixed




1 Sliding / 1 Fixed




2 Sliding




3 Sliding




2 Sliding / 1 Fixed




2 Sliding / 1 Fixed






2 Sliding / 2 Fixed




Quad Sliding



Corners

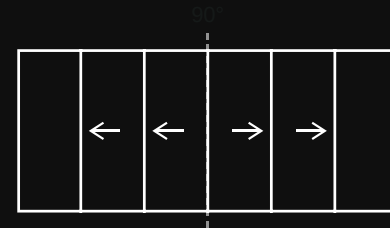

Open corner with movable corner post or fixed glass bonded corner

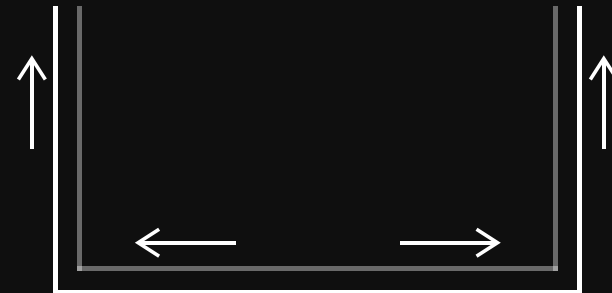


U-shape corner with movable corner post or fixed glass bonded corners


Configurations




HIDDEN TRACK SOLUTION

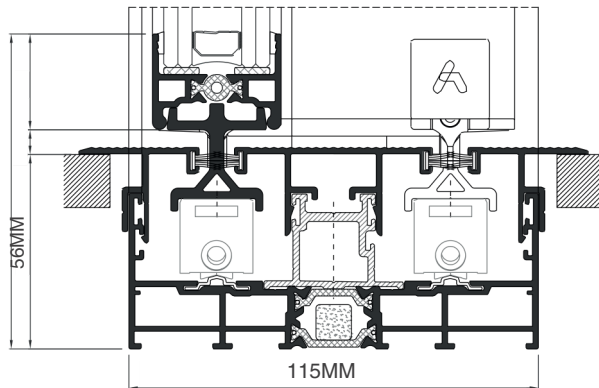


BESPOKE DRAINAGE SOLUTION

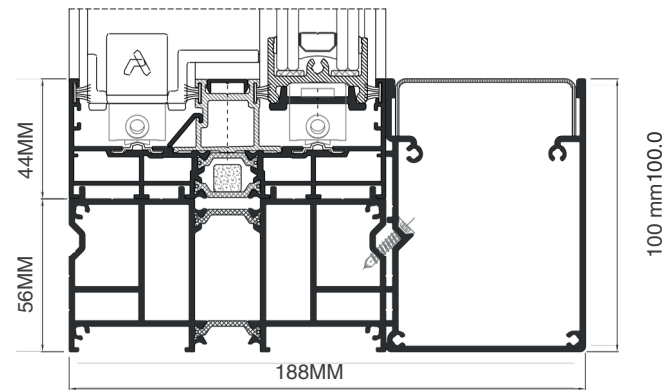


INTERLOCK HANDLE

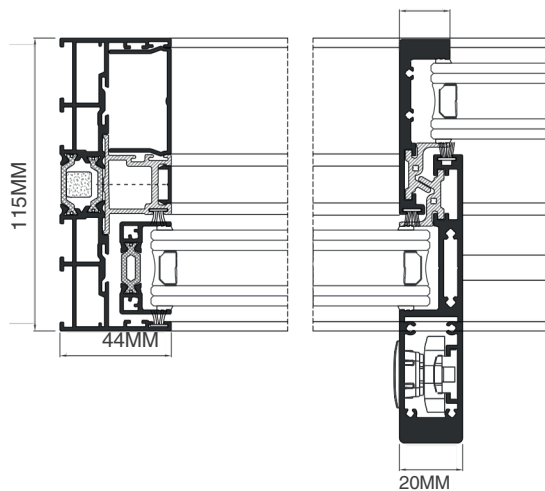

DOUBLE TRACK

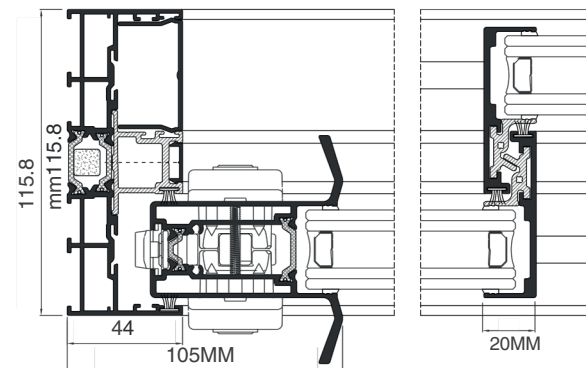

HIDDEN TRACK SOLUTION

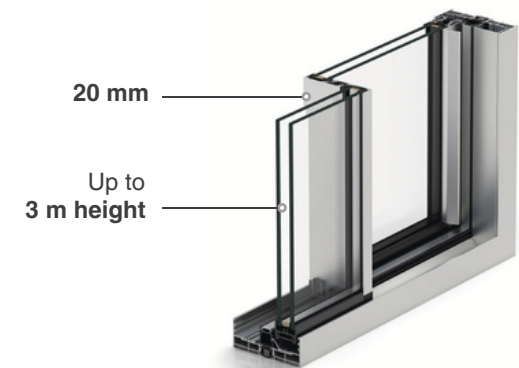

Hardware



GREY 7016 BLACK 9005 WHITE 9016 LIGHT SILVER DARK SILVER CUSTOM RAL

Thermally broken minimalist sliding system that provides maximum luminosity with a minimal aluminium interlock profile. It has an elegant design only 20 mm sightline and offers the possibility of an inlaid closing system and of hiding the frame along the perimeter.

Possibility of locking system in the interlock, thus allowing the concealment of the sashes in the frame from a frontal view. Possibility of embedded locking system which facilitates the sashes crossing.



INTERLOCK HANDLE



**SECURITY
HARDWARE**

**FLUSH SECURITY
HARDWARE**


Colours



Black 9005 Matt



Anthracite Grey 7016 Matt



White 9016 Gloss



Custom RAL



Textured



Anodized





Glideline